

## BEST AVAILABLE COPY

## ULTRASONOGRAPHIC APPARATUS


Patent number: JP2004033617  
Publication date: 2004-02-05  
Inventor: HAGIWARA TAKASHI  
Applicant: MATSUSHITA ELECTRIC IND CO LTD  
Classification:  
- International: A61B8/00; A61B8/00; (IPC1-7): A61B8/00  
- european:  
Application number: JP20020197434 20020705  
Priority number(s): JP20020197434 20020705

Report a data error here

## Abstract of JP2004033617

**PROBLEM TO BE SOLVED:** To remove a banded artefact due to correlation between concurrent received ultrasonic beams to the same transmit ultrasonic wave in a concurrent receiving ultrasonic apparatus.

**SOLUTION:** According to a drive signal of a transmit part 1, an ultrasonic pulse is generated from an ultrasonic probe 2 and sent to a subject. The echo of the ultrasonic pulse is converted to a receiving signal by the ultrasonic probe 2. Two-direction receiving beams are simultaneously formed to one-time ultrasonic transmission. The received signals are amplified by receiving parts 3, 4, and delayed and added to form a received beam data. A B-mode processing part 5 converts the received beam data to variable density data. A factor control part 9 specifies a filter factor in consideration of correlation of the ultrasonic beams, and the variable density data for two lines are filtered by an inter-beam filter 8. DSC6 (differential scanning calorimetry 6) performs geometrical conversion to convert the filtered data to an image signal, and the image signal is displayed on a monitor 7.  
COPYRIGHT: (C)2004,JPO

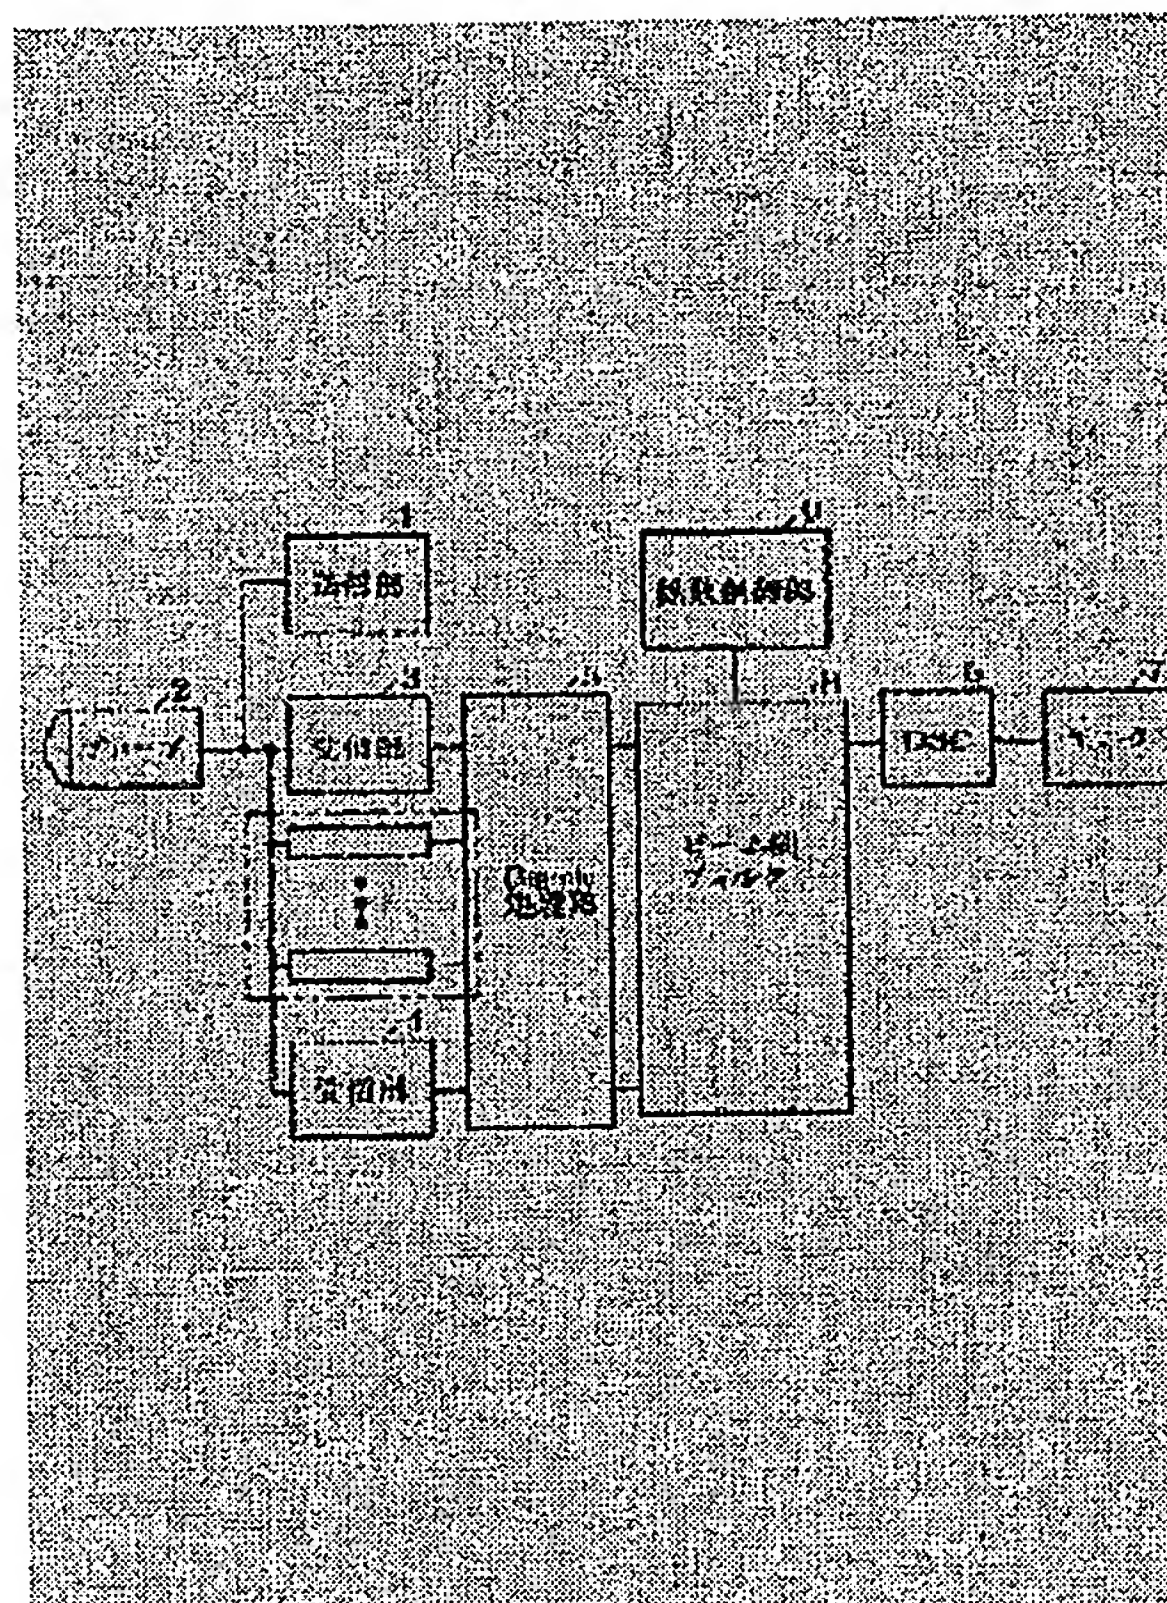

Data supplied from the esp@cenet database - Worldwide